



8×APL Trunk
2×10/100M BASE-T
2×100M SFP

-40°C 70°C
IP66
35mm

) G

TP3X(2
1000

50V 57.5W)



!

□

□ (

-40°C 70°C
35mm

) G

TP3X(2
1000

50V 57.5W)



!

□

) (

2×APL Trunk
12×APL Spur
-40°C 70°C
IP66
Ex ic nA [ic Gc] IIC T4 Gc

) G

1000

TL3X 2
50V 57.5W

(E G

SPAC 2

0.54W

/




!

!

IEEE 802.3cg 10BASE-T1L(IEEE802.3cg-2019)10Mbps
1000


“Trunk”“Spur”
IEC61158-2



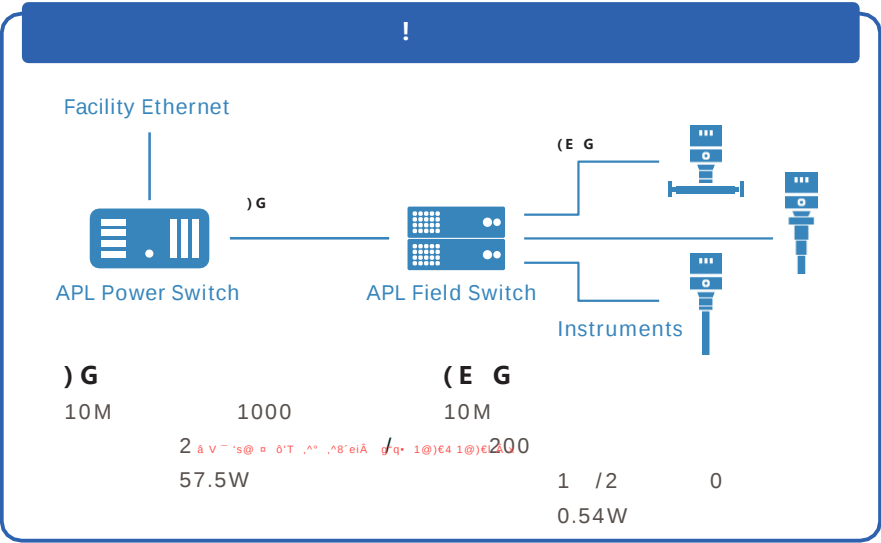

“E”OMCI/OI/OAPL

APL“E”OMC

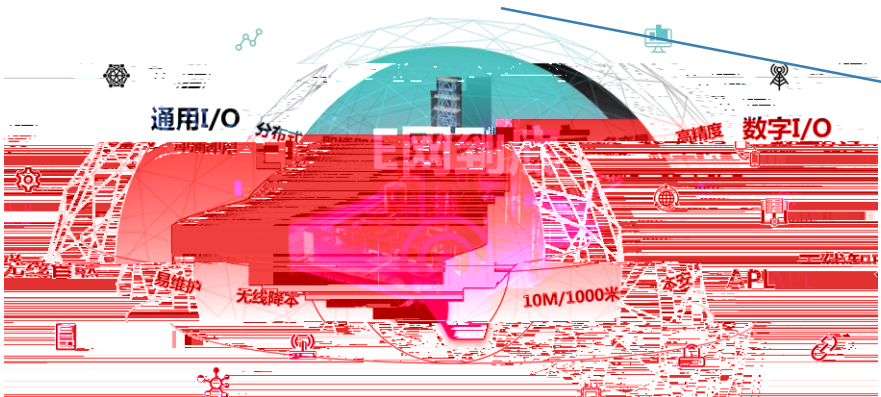

通用I/O

无线I/O

10M/1000M

数字I/O

APL

